
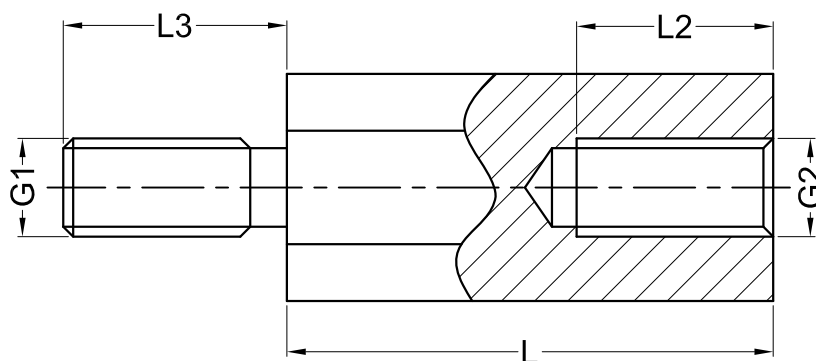


Thread Lengths (mm)							
L	L2	L3					
5	3	4	5	6	8	10	12
6	4	6	8	/	/	/	/

Type	Hexagonal
Styles	Internal/External with undercut (optional without undercut)
Material	Brass 2.0401
Surface	Nickel plated (G3E)
Standard Pack	From 100 pcs
Length Tolerance	± 0.1 mm



Part No.	SW (Hexagon)	Internal Thread	External Thread	Standard L Length In (mm)	
				05	06
2100 x L (Length)	SW 5	4-40 UNC	4-40 UNC	05	06
2103 x L	SW 5	4-40 UNC	M3	05	06
2130 x L	SW 5	M3	4-40 UNC	05	06

Order Example	Additional Information 1	Additional Information 2
With undercut: 2100 x L = 2100 x 5 mm Without undercut: 2100 x L = 2100 x 5 mm (without undercut)	All UNC-Types are also available in steel; with other length; with UNC 6-32, UNC 8-32 and UNC 2-56 thread.	The option "without undercut" is without extra charge.

Gecko International Co.							DATE	2012-4-28
TITLE	HEX SPACER - MALE / FEMALE						SCALE	FIT
PART NAME	/	MOLD NO.	/	DRAW	JF	UNIT	MM	
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0	
DWG NO.	E0016	COLOR	/	APPROVAL	FDL	VIEW		