Internal Thread Lengths (mm)				
L	L2 (M2)	L2 (M2.5 to M5)	L2 (M6)	L2 (M8)
5	3	3	/	/
8	5	5	/	/
10	6	6	6	/
12	6	7	7	/
15	6	10	10	10
18	6	10	10	/
From 20	6	10	12	14

External Thread Lengths (mm)	
G1=G2	L3
M2	5
M2.5	6
M3	6
M4	8
M5	8
M6	10
M8	14

Type	Hexagonal
Styles	Internal/External with undercut (optional without undercut)
Material	Steel 1.0718
Surface	Zinc plated (A3F)
Standard Pack	From 100 pcs
Length Tolerance	± 0.1 mm
Minimum Tensile Strength	500 N/mm²

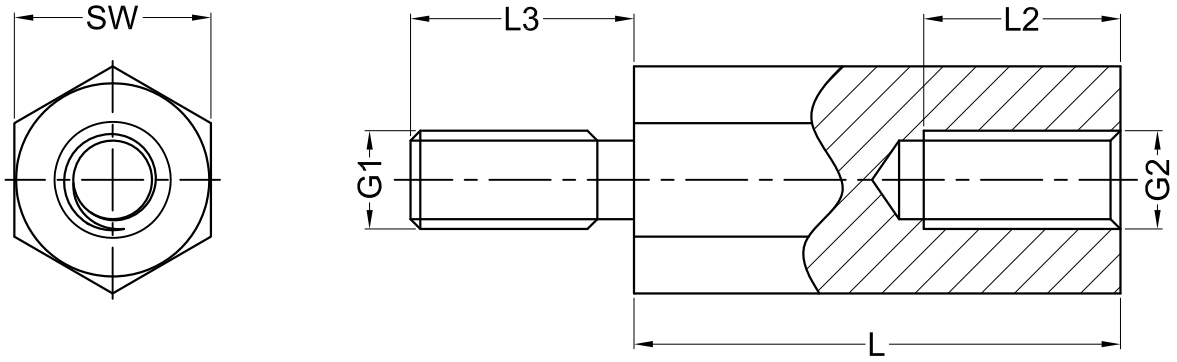

Part No.	SW (Hexagon)	G1=G2 (Thread)	Standard L Length In (mm)																						
			05	**08**	**10**	**12**	**15**	**18**	**20**	**25**	**30**	**35**	**40**	**45**	**50**	**55**	**60**	**65**	**70**	**75**	**80**	**85**	**90**	**95**	**100**
221 x L (Length)	SW 4	M2	05	08	10	12	15	18	20	25	30	35	40												
2212 x L	SW 4	M2.5	05	08	10	12	15	18	20	25	30	35	40												
222 x L	SW 5	M2.5	05	08	10	12	15	18	20	25	30	35	40	45	50										
223 x L	SW 5	M3	05	08	10	12	15	18	20	25	30	35	40	45	50										
224 x L	SW 5.5	M3	05	08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70						
225 x L	SW 6	M3	05	08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
226 x L	SW 7	M4	05	08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
227 x L	SW 8	M4	05	08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
228 x L	SW 8	M5		08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
229 x L	SW 10	M6			10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
2213 x L	SW 13	M8					15		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100

Order Example	Additional Information 1	Additional Information 2
With undercut: 221 x L = 221 x 10 mm Without undercut: 221 x L = 221 x 10 mm (without undercut)	The option "without undercut" is without extra charge.	SW 13 applies for DIN 2768-m

Gecko International Co.						DATE	2012-4-28
TITLE	HEX SPACER - MALE / FEMALE					SCALE	FIT
PART NAME	/	MOLD NO.	/	DRAW	JF	UNIT	MM
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0
DWG NO.	E0014	COLOR	/	APPROVAL	FDL	VIEW	